



LINEAR ACTUATOR


HT-3000



Specification:


Type	HT3000	HT6000
Input	24V (12V,36V)	
Load Capacity	3000N	6000N
No Load Speed	13mm/sec.	5mm/sec.
Stroke Length	50~400mm	
Mounting	Clevis to Clevis(0o/ 90o angles available)	
Limit Switch	Build-in	
Duty Cycle	S2-10min	
Static Load	3000N	6000N
Inner Tube	Aluminium Alloy	
Color	Black or Grey	
IP Grade	IP54	
Operation Temperature	-26°C ~ 65°C	
Safety Certificate	CE Certificate	

The Load Coordinate Drawing:

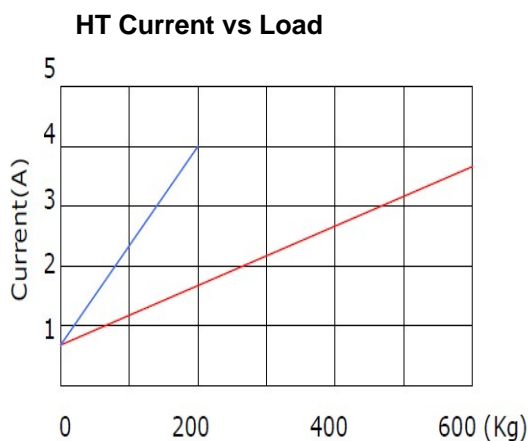




HT Speed vs Load

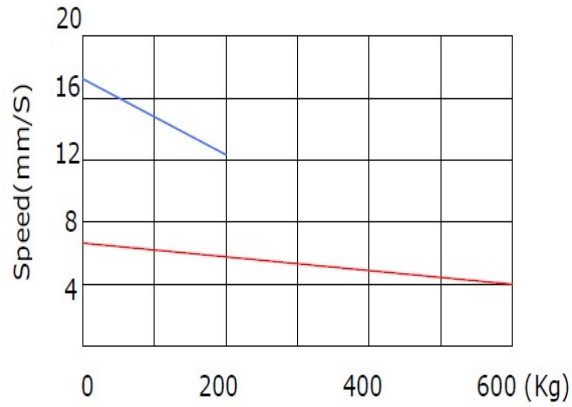

The Install Dimension Drawing:

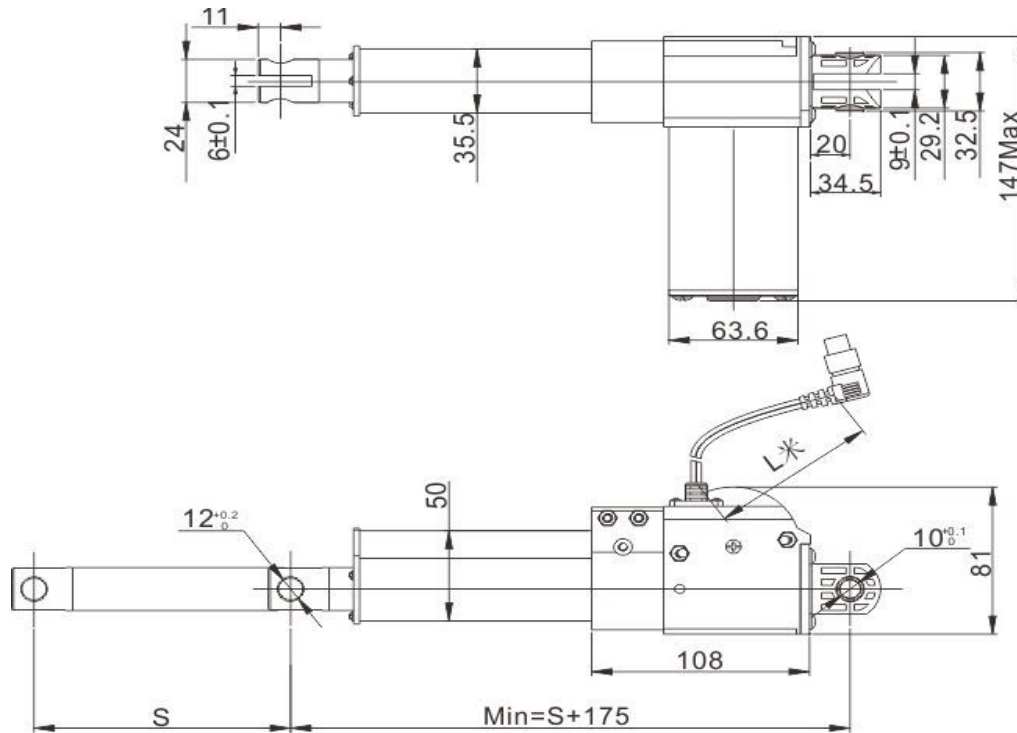

Production Information



DLC-PA&DHS-A Remote:



Dailymag[®]
www.dmgmotor.com

ISO9001:2008



Dailymag[®]
www.dmgmotor.com

ISO9001:2008



Tel: +86-574-27721336
Fax: +86-574-26280021
Mobile: +86-138-8443-6998

www.dmgmotor.com